



## General Characteristics


### Standard Charge

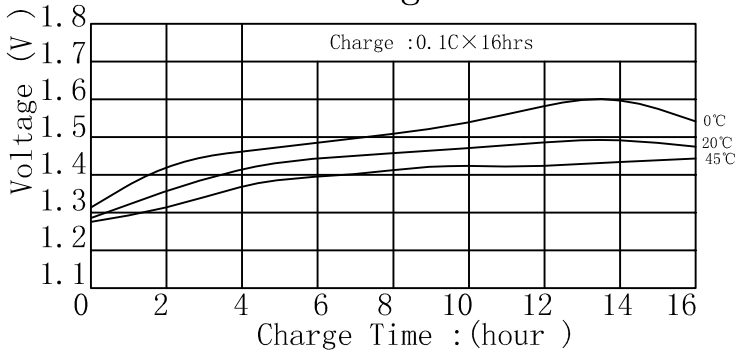


### Fast Charge

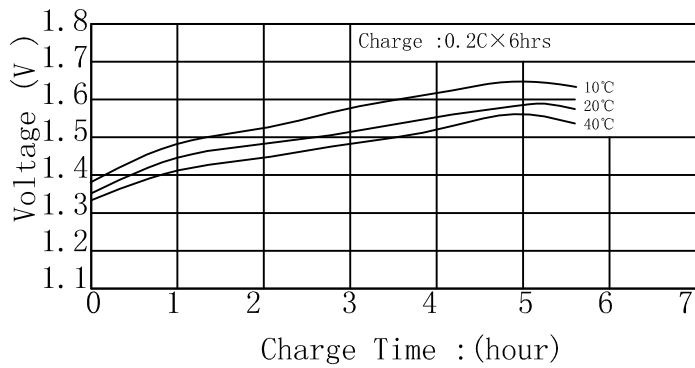

### Discharge characteristic at 20°C

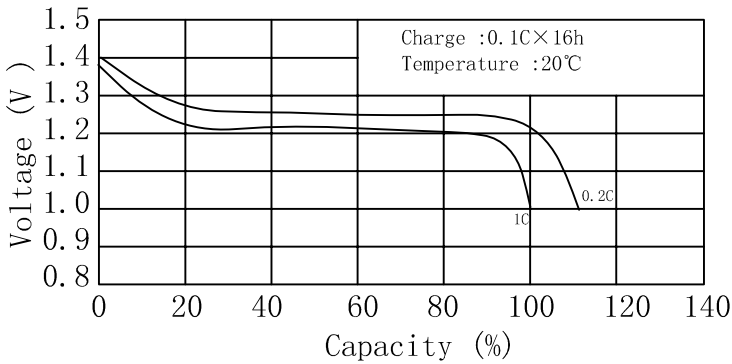

### Cycle life

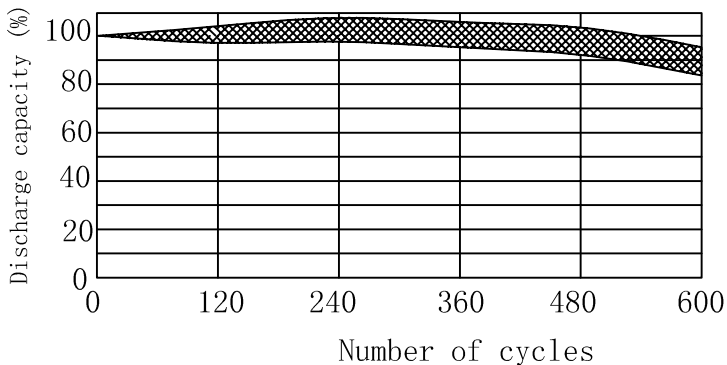


Note:

1. Nominal capacity rated at C/5, 20° C.
2. Other capacities are for reference .
3. Weight and internal resistance are for reference

## Specifications

Nominal Voltage		24V	
Capacity (mAh)		C/5	1C
	Nominal	13000	11700
	Typical	13400	13000
Dimension	Thick /cell	32.3 ± 0.2mm	
	Wide /cell	89.5 ± 0.5mm	
Approx		5200g	
Internal Resistance (at 1KHz)		≤ 10mΩ /cell	
Charge	Standard	1300 × 16hrs	
	Fast	2600 × 6hrs	
	Trickle	390-650mA	
Discharge Cut-off Voltage		21V	
Cycle Life		≥ 500	
Ambient Temperature	Standard Charge	0°C--50°C	
	Fast charge	10°C--50°C	
	Trickle charge	0°C--45°C	
	Discharge	-20°C--60°C	
	Storage	-20°C--45°C	
Relative Humidity		65 ± 20%	

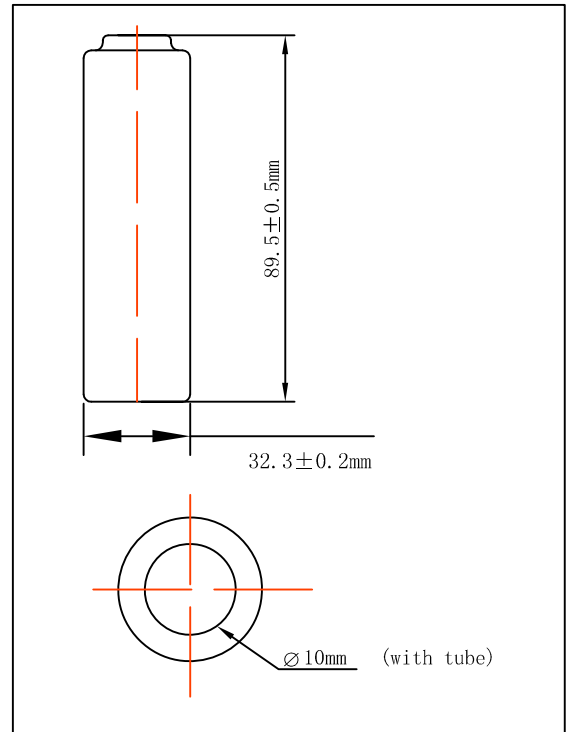

### Storage Characteristics

